


CELESTIAL FOUNTAINS®

SYSTEM FEATURES

- High efficiency fountain design with minimal head loss, resulting in maximum Fountain performance
- Total in-water component **Three Year Warranty**
- Complete package includes Electrical Control Panel and underwater cable

- Individual high density polyethylene floats are in-water adjustable
- Eight Fountain spray patterns—simple interchangeable nozzles ranging from 10 to 25 HP

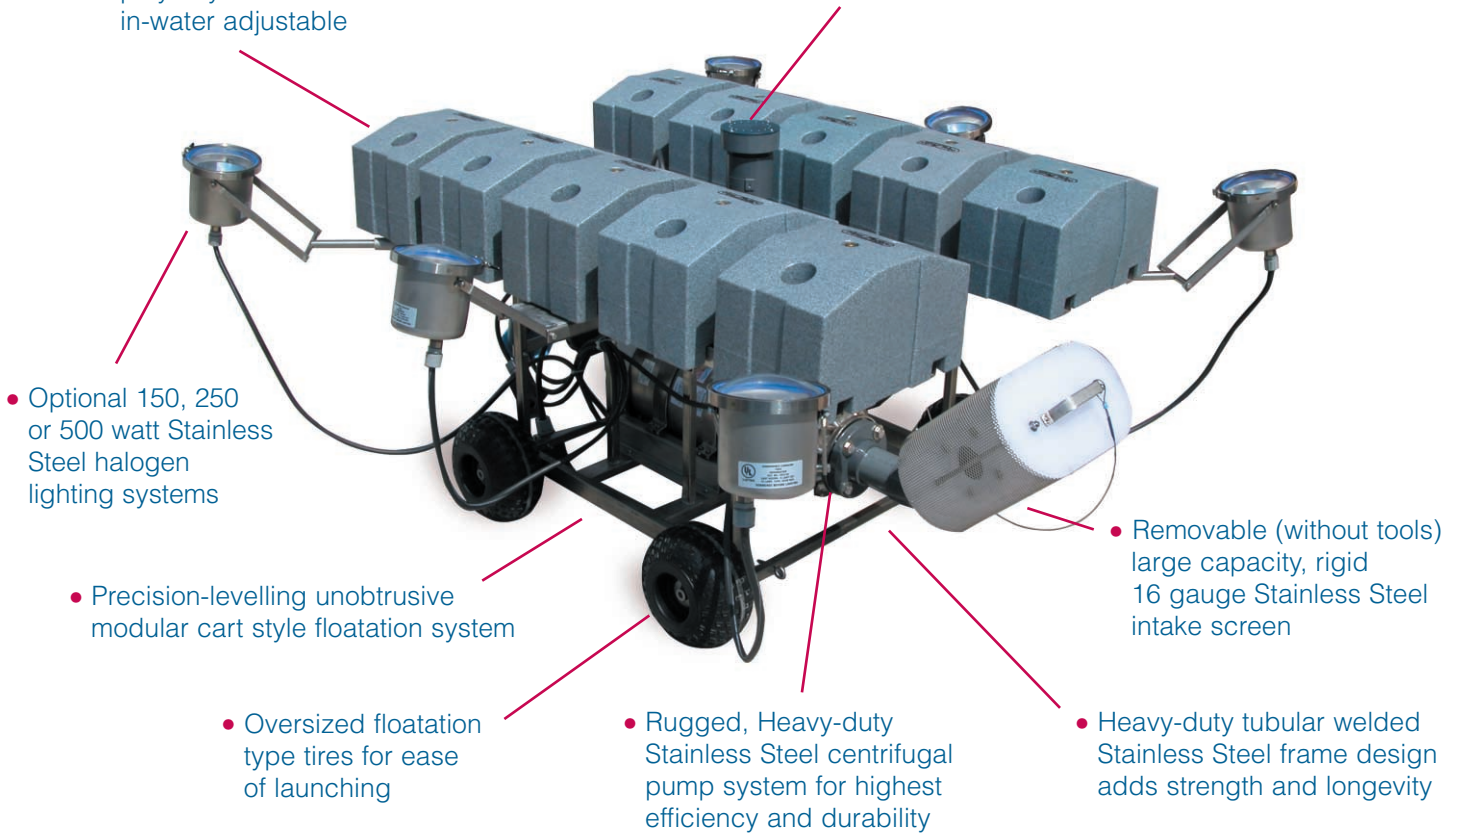

- Optional 150, 250 or 500 watt Stainless Steel halogen lighting systems

- Precision-levelling unobtrusive modular cart style floatation system

- Oversized floatation type tires for ease of launching

- Rugged, Heavy-duty Stainless Steel centrifugal pump system for highest efficiency and durability

- Removable (without tools) large capacity, rigid 16 gauge Stainless Steel intake screen

- Heavy-duty tubular welded Stainless Steel frame design adds strength and longevity

60 HZ CELESTIAL FOUNTAINS® PERFORMANCE SPECIFICATIONS

| MODEL NUMBER | HP | VOLTAGE | RUNNING AMP DRAW | 60 HZ MOTOR RPM | MIN. DEPTH |
|---------------|----|---------|------------------|-----------------|------------|
| 84102 1 PHASE | 10 | 240 | 55 | 3450 | 4' |
| 84102-3 | | 230 | 35 | 3450 | 4' |
| 84104-3 | | 460 | 17.5 | 3450 | 4' |
| 84152-3 | 15 | 230 | 43 | 3450 | 4' |
| 84154-3 | | 460 | 21.5 | 3450 | 4' |
| 84202-3 | 20 | 230 | 60 | 3450 | 4' |
| 84204-3 | | 460 | 30 | 3450 | 4' |
| 84252-3 | 25 | 230 | 71 | 3450 | 4' |
| 84254-3 | | 460 | 35.5 | 3450 | 4' |

